Sectt. II 48—2?,368—9-3-20.

P.W (1920) Department.

M 15 SERIES.

(1) Rec'd
(2) Mis/B 11

12
4.1.21

G.O. No. 1954 W

DATED 14 12-20

[Despatch Abstract.]

Resubmitting for Sanction plans and Estimates for constructing police building at Lullia in the South Kanara District

C.F. 20—9,886—22-1-18

H O M E (JUDICIAL) **DEPARTMENT**

A. 3622 A

Received ..... 19.. *Registered* 23.11. 1920

REGISTRAR DEPARTMENT
22 NOV. 1920
GOVT. OF MADRAS

Subject

Resubmitting for sanction plans and estimates for constructing police buildings at Sullia in the South Kanara District.

ENCLOSURES.
No. 2. / Duplicate,
Revised / of Copies & Tracings
Spare copies

R.C No. 812 A/20

Station Madras. *Dated the* 22nd November 1920.91

From (Name) P. B. Thomas, Esquire,

(Designation) Inspector-General of Police.

To The Secretary to the Government of Madras,

H O M E (JUDICIAL) Department.

Sir,

I have the honour to resubmit the plans and estimates for the police buildings at Sullia in the South Kanara District, received with Home (Judicial) Department Memorandum No.3220 A-1, dated 16th November 1920, in the circumstances stated below.

p 38 infra 2. The work is in progress and a sum of Rs.4931-3-4 has already been expended on the work up to August 1920. Vide report of the Superintending Engineer in the comparative statement accompanying the estimate. It is not possible

p33 4 lines

to stop the work at this stage and I therefore recommend that the estimate be sanctioned as a special case.

I have the honour to be

Sir,

Your most obedient servant.

E. P. Rodan [illegible]

for Inspr.-Genl. of Police.

OFFICE OF THE INSPECTOR-GENERAL OF POLICE
18 NOV 1920
MADRAS

Note.

2 doors for lock up having an aggregate area of 33 Sft. weigh 6½ Cwts. approximately.

The distance they have to be carted (Shirady to Sullia) is 51 miles. The cost of a cart for this distance is 51 miles x 3 annas or $\frac{153}{16}$ - or Rs.9-9-0 per cart. A cart can carry 1000 lbs. the cartage for 6½ Cwts or 728 lbs. is $\frac{\text{Rs.9-9-0}}{\text{1000 lbs.}}$ X 728 lbs.- or Rs.6-15-5 which is approximately equal to 3 annas per sq.ft. as the amount thus arrived is 33 x 3- Rs.6-3-0.

Executive Engineer,
West Coast Division.
26/8/20

WEST COAST DIVISION.
Accompanied to [illegible] Engineer's
No. 4/13768E 30/8/20
PUBLIC WORKS DEPARTMENT.

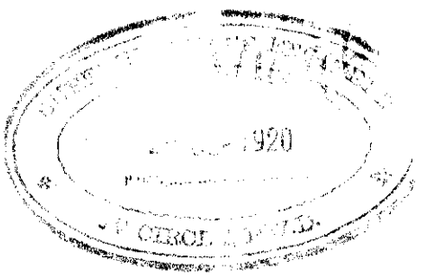

Report to accompany the revised estimate for constructing a second class Police station House and quarters for a Sub Inspector together with huts for 2 head constables and 9 constables, a well, stable etc at Sullia.

Amount of the original estimate		.13300
do	revised do	15076 ~~14750~~
Excess ~~repairing~~ requiring	sanction	1776 ~~1450~~

Administrative approval for Rs.14000 for the work was accorded in G.O. No.2333 W dated 28-11-1913 and the estimate sanctioned in C.R.No.307/13-14 for Rs.13300 was prepared in 1914. The sanctioned rates are now unworkable and the estimate is revised for the following reasons

1. Considerable rise in price of labour and value of materials owing to abnormal conditions due to the war
2. Sullia is an interior ghat village highly malarial where skilled labour is not available and has to be imported from distant places.
3. Materials such as lime, tiles etc. have to be conveyed from Mangalore

The original estimate provided 10 per cent extra on the then current rates for the inconveniences of the locality. In the case of similar localites such as Charmady, Kollur, and Sherady where works have recently been carried out, this percentage was found insufficient and the works dragged on for good number of years and increase of 20 to 25 % has to be allowed. An extra of 20 per cent over the ordinary labour rates for the plains is necessary for work in this locality and is allowed in the revised estimate as approved of by the Executive Engineer.

Washing platforms (3' x 3' inside dimension) as per sketch enclosed and sullage drains in rear as per Sanitary design No.48 A/1914 are provided for in the revised estimate the sullage will be let into low ground in the vicinity

P.T.O

The huts are built on an eminence and the ground round the huts slopes rapidly away from easy run off of rain water and no special provision for disposal of storm water is necessary except dressing the ground to slop away from the huts which will be done.

Provision is made in the revised estimate for (1) 2 blocks of huts for 2 head and 9 constables (2) a second class police station (3) Sub Inspector's quarters and stables and (4) a well. The provision for a ~~latrine~~ latrine included in the original estimate is deleted in the revised estimate as a latrine in this ~~remote~~ locality where there is no scavenging arrangement is not necessary. The huts will be built ~~in to~~ with a basement height of 2 feet as is ordered for the west coast. The original estimate provision for the Sub Inspector's quarters and stables is deleted ~~allowed in~~ the revised estimate any revision pending receipt of the new type design.

Data for the different descriptions of work prepared with reference to actual experience in the locality and current rate or prices for materials are attached.

Executive Engineer
West coast Dn

6

Home (Judl) Dept

Construction of police buildings at Sullia in S. South Kanara Dt.

et No 3662A - p... from the Sd Of Police RC No 1812 H&B 8 22-11-20.

WS

Submitted that in the circumstances now explained, the revised estimate for Rs 15,075/- may be approved and the file transferred to the PWD for issue of orders.

Judl No 3662A/20

26.11.20

29.11.20

2/12/20

26.11.20. Secy.

N... 1812 H&B ...

P. WD

DS

A draft order approving the revised estimate is submitted. The original estimate approved in GO No 2333 Jud dt 28th November 1913 amounted to Rs 14000. The present revised estimate now proposed excluding provision for Sub Inspectors quarters amounts to Rs 15075.

B 8.12.20

8/12/20

2.12.20

Sectt. II-10 (a)—14,622—8-8-19. (6)

P. W. DEPARTMENT.

Buildings - Quarters - Police. Salli Kanara - Sallia-

Revised Estimate - approved

READ AGAIN G.O. No. 2333W, dated 28th November 1913

" " " " D M No " 3220 A-1 dt 16-11 1920.

READ ALSO:—

C. No. 4199 W/B From the I.G. of Police No. 1012/H/B dated 22nd November 1920.

P

" " " " " " " " 19

" " " " " " " " 19

ORDER. No. 1954W, dated 14-12- 1920

Mic

The revised estimate submitted by the I.G. with his letter first-read above amounting to Rs 150 75 for Constructing a Second Class Police Station with Quarters for 2 head Constables and 9 Constables and a well at Sallia in the Salli Kanara Dt is approved in supersession of the sanction accorded in the G.O. read again above.

2 The Estimate is forwarded to the SE IV circle for technical sanction.

24-12-20 Sent to SE IV circle for technical sanction

Do the SE IV circle multiplan original & revised sketches - As asked

Home (Govt) Dept / Mic

7D

8/12/20

2.12.20

SE